

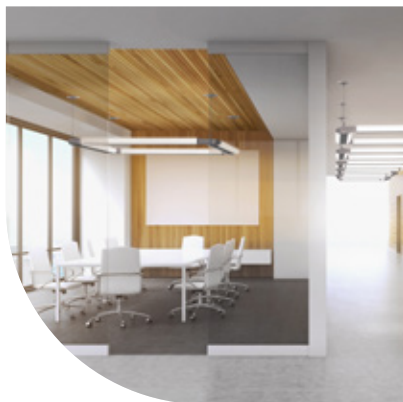


THE FUTURE IS ON®

VISCOR | a **LEVITON**
company


Visioneering LED Product Guide

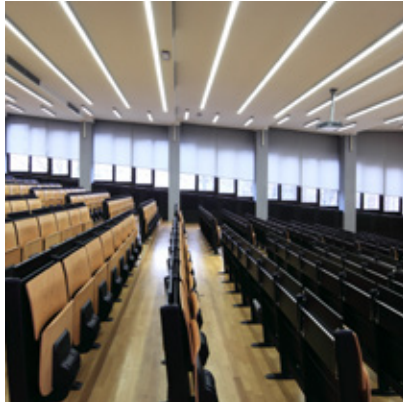

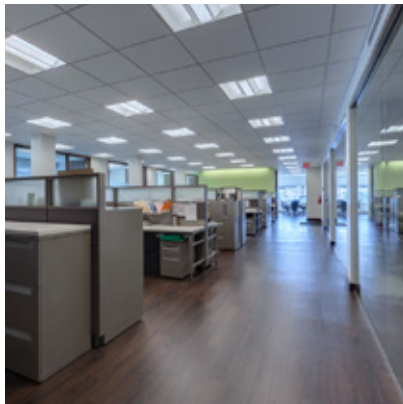

VISIONEERING by VISCOR

Visioneering is a comprehensive brand that specializes in lighting solutions suitable for commercial, industrial, architectural, recreational and retail applications. All Visioneering standard and customizable luminaires are manufactured from the highest quality raw materials. They integrate leading edge technology, offer intuitive functionality, increased performance, enhanced connectivity, and improve the overall well-being of its occupants. Premium quality products and quick delivery times are two of Viscor's cornerstones. We ship 90% of the Visioneering products from our facility within 10 business days or less.

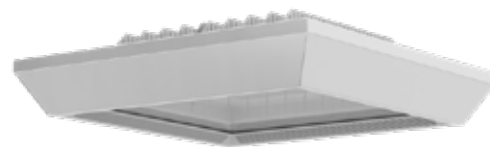

LHBA LED Suspended High Bay

Premium-Grade ★★
High or Low Bay Luminaire



Applications

- Schools
- Retail Stores
- Showrooms
- Gymnasiums
- Churches
- Atriums

Specifications

Size	2x2
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	10000 - 24000
Input Wattage	91w - 208w



LHBR LED Recessed High Bay

Premium-Grade ★★
High or Low Bay Luminaire



Applications

- Schools
- Retail Stores
- Showrooms
- Gymnasiums

Specifications

Size	2x2
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	10000, 15000, 20000
Input Wattage	91w - 181w



LHBC LED Suspended High Bay

Commercial-Grade ★
High or Low Bay Luminaire



Applications

- Manufacturing
- Distribution
- Warehouse Areas
- Retail Stores
- Supermarkets

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	4000K, 5000K
Lumen Output	12000 - 60000
Input Wattage	78w - 412w



LHBV LED High Bay Vapor Tight

Premium-Grade ★★
Wide Beam Molded Enclosed and Gasketed Glass Reinforced Polyester Housing Luminaire (IP67)



Applications

- Cleanrooms
- Cold Storage
- Food Processing
- Ships/Marine Vessels
- Dusty Environments
- Swimming Pools

Specifications

Size	48"
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	12000 - 30000
Input Wattage	79w - 201w



Optional Wireguard
Shown (W1)

LHBG LED High Bay Type G

Premium-Grade ★★
High Bay Luminaire



Applications

- Athletic Centers
- Gymnasiums
- Manufacturing & Warehouse Areas

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	4000K, 5000K
Lumen Output	9000 - 24000
Input Wattage	83w - 205w



Optional Louver
Shown (L05)



LHBD
LED High Bay Type D
Premium-Grade ★★
Row-Mountable High or Low
Bay Luminaire

- Applications**
- Schools
 - Retail Stores
 - Industrial
 - Showrooms
 - Atriums

Specifications	
Size	48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	8000 - 24000
Input Wattage	59w - 176w



LHBH
LED High Bay Type H
Premium-Grade ★★
High or Low Bay Luminaire

- Applications**
- Schools
 - Warehouses
 - Industrial/Commercial
 - Showrooms
 - Atrium/Auditorium
 - Retail
 - Cafeteria

Specifications	
Size	27"
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	10000 - 20000
Input Wattage	102w - 208w



LHBL
LED High Bay Type L
Specification-Grade ★★★
Direct/Indirect High or Low Bay
Luminaire

- Applications**
- Schools
 - Retail Stores
 - Industrial
 - Showrooms
 - Atriums

Specifications	
Size	48", 96"
CRI	80 - 89
Color Temp.	4000K, 5000K
Lumen Output	5000 - 16000
Input Wattage	55w - 160w



LHBX
LED High Bay Type X
Specification-Grade ★★★
Wide Beam Welded Luminaire
With Wireguard & Door Frame

- Applications**
- Athletic Centers
 - Gymnasiums
 - Garage & Workshops
 - Manufacturing
 - Warehouse

Specifications	
Size	24", 48"
CRI	80 - 89
Color Temp.	4000K, 5000K
Lumen Output	12000 (24") 24000 (48")
Input Wattage	108w (24") 216w (48")



LBL-VL
LED Bay Luminaire
Commercial-Grade ★
Surface-Mounted Luminaire with
Polycarbonate Lens



- Applications**
- Manufacturing
 - Distribution
 - Warehouse Areas
 - Retail Stores
 - Supermarkets

Specifications	
Size	24", 48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	2800 - 24000
Input Wattage	23w - 206w


NEW

OnCurve Concave LED Recessed Troffer

Premium-Grade ★★
Recessed Luminaire Featuring
Concave Lens

Applications

- Office Areas
- Retail Stores
- Classrooms
- Hospitals
- Nursing Homes
- Hospitality

Specifications

Size	1x4, 2x2, 2x4, 20x60
CRI	80+
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2000 - 7000
Input Wattage	17w - 55w


NEW

OnCurve Convex LED Recessed Troffer

Premium-Grade ★★
Recessed Luminaire Featuring
Convex Lens

Applications

- Office Areas
- Retail Stores
- Classrooms
- Hospitals
- Nursing Homes
- Hospitality

Specifications

Size	2x2
CRI	80+
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2400 - 5000
Input Wattage	20w - 42w


NEW

OnCurve Concave with C108 LED Recessed Troffer

Premium-Grade ★★
Recessed Luminaire Featuring
Concave and Spine Lens

Applications

- Office Areas
- Retail Stores
- Classrooms
- Hospitals
- Nursing Homes
- Hospitality

Specifications

Size	1x4, 2x2, 2x4, 20x60
CRI	80+
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2000 - 7000
Input Wattage	17w - 55w



Quadra LED Recessed Drop Lens

Specification-Grade ★★★
Recessed Luminaire Featuring Drop
Lens Options

Applications

- Office Lounge Areas
- Public Spaces
- Lobbies
- Retail

Specifications

Size	2x2, 4x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K, Tunable White
Lumen Output	2000 - 16000
Input Wattage	19w - 142w



LRTA LED Recessed Type A

Commercial-Grade ★
Recessed Luminaire Featuring
a Single
Edge-To-Edge Lens

Applications

- Classrooms
- Hospitals
- Office Areas
- Retail Stores
- Supermarkets

Specifications

Size	1x4, 2x2, 2x4, 20x60, 500x1500, 30x30, 750x750
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2600 - 9000
Input Wattage	25w - 79w



LRTF LED Recessed Type F

Specification-Grade ★★★
Recessed Luminaire Featuring
a Shallow Elliptical Center Lens

Applications

- Office Areas
- Retail Stores
- Classrooms
- Corridors

Specifications

Size	1x1, 1x4, 2x2, 2x4, 30x30, 750x750, 20x60, 500x1500
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	1600 - 7000
Input Wattage	15w - 55w





**LRTG ClearForm
LED Recessed Type G**
Commercial-Grade ★

Recessed Luminaire Featuring a single-piece luminous lens without door frame

Applications

- Office Areas
- Retail Stores
- Classrooms
- Corridors

Specifications

Size	1x4, 2x2, 2x4 30x30, 750x750 20x60, 500x1500
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	3700 - 9200
Input Wattage	36w - 77w



**LRTH
LED Recessed Type H**
Commercial-Grade ★

Recessed Low-Profile Single Lensed T-bar Luminaire

Applications

- Office Areas
- Retail Stores
- Classrooms
- Corridors
- Hospitals
- Nursing Homes

Specifications

Size	1x4, 2x2, 2x4, 30x30, 750x750 20x60, 500x1500
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2000 - 5000
Input Wattage	18w - 40w



**LRTJ
LED Recessed Type J**
Premium-Grade ★★

Recessed Luminaire Featuring Dual Shallow Semi-Round Lenses

Applications

- Office Areas
- Retail Stores
- Classrooms
- Corridors
- Hospitals
- Nursing Homes

Specifications

Size	1x1, 1x4, 2x2, 2x4, 30x30, 20x60, 750x750 500x1500
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	1600 - 6500
Input Wattage	16w - 52w



**LRTP
LED Recessed Type P**
Commercial-Grade ★

Recessed Luminaire Featuring a Wide Curved Lens

Applications

- Office Areas
- Retail Stores
- Classrooms
- Corridors
- Hospitals
- Nursing Homes

Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2700 - 6100
Input Wattage	22w - 49w



**LRTZ
LED Recessed Type Z**
Commercial-Grade ★

Recessed Luminaire Featuring a Single Angled Center Lens

Applications

- Classrooms
- Hospitals
- Office Areas
- Retail Stores
- Supermarkets

Specifications

Size	1x4, 2x2, 2x4, 30x30, 750x750 20x60, 500x1500
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2000 - 5000
Input Wattage	19w - 40w



**LTDCR
LED Recessed
Circular**
Specification-Grade ★★★

Recessed Drywall Luminaire Featuring a Static Circular Lens

Applications

- Call Centers
- Corridors
- Hotels
- Office Areas
- Recreation Rooms
- Restaurants
- Retail Stores & Supermarkets
- Atriums & Foyers

Specifications

Size	1x1, 2x2, 3x3, 4x4
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	800 - 10500
Input Wattage	13w - 100w

NEW

WET LOCATION SERIES

Visioneering's series of wet location recessed troffers are both functional, stylish and suited for shallow and obstructed plenum applications. These IC-rated luminaires are constructed with a welded steel housing and finished with white polyester powder paint. Various lens options are available with the additional option to add tamper proof fasteners. The gasket between the lens and one-piece door frame protects against moisture and debris.



**LRTA Wet Location
LED Recessed T-Bar**
Premium-Grade ★★
Recessed Wet Location
Luminaire

Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	3500 - 9000
Input Wattage	33w - 79w



**LRTF Wet Location
LED Recessed T-Bar**
Specification-Grade ★★★
Recessed Wet Location
Luminaire

Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	3800 - 7000
Input Wattage	30w - 56w



**LRTG CLEARFORM
Wet Location
LED Recessed T-Bar**
Premium-Grade ★★
Recessed Wet Location
Luminaire

Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	4000 - 9200
Input Wattage	34w - 74w



**LRTH Wet Location
LED Recessed T-Bar**
Premium-Grade ★★
Recessed Wet Location
Luminaire

Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	4000 - 5000
Input Wattage	40w - 46w

OUTLINE SERIES

Define your space with the Outline Series. Create recessed silhouettes with the O, U, L, and I geometrically shaped Visioneering luminaires. Featuring a single continuous lens and multiple configuration, the Outline Series combines modern styling with high visual comfort.



Outline LED Recessed Type O

Specification-Grade ★★★

Recessed Drywall Luminaire Featuring a Single Continuous Lens

Specifications

Size	2x2
CRI	80 - 89, 90 - 99
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2000 - 4000
Input Wattage	21w - 36w



Outline LED Recessed Type U

Specification-Grade ★★★

Recessed Drywall Luminaire Featuring a Single Continuous Lens

Specifications

Size	2x2
CRI	80 - 89, 90 - 99
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	1500 - 3000
Input Wattage	13w - 26w



Outline LED Recessed Type L

Specification-Grade ★★★

Recessed Drywall Luminaire Featuring a Single Continuous Lens

Specifications

Size	2x2
CRI	80 - 89, 90 - 99
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	1000 - 2000
Input Wattage	11w - 21w



Outline LED Recessed Type IS

Specification-Grade ★★★

Recessed Drywall Luminaire Featuring a Single Continuous Lens

Specifications

Size	2x2
CRI	80 - 89, 90 - 99
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	500 - 1000
Input Wattage	8w - 12w



Outline LED Recessed Type IM

Specification-Grade ★★★

Recessed Drywall Luminaire Featuring a Single Continuous Lens

Specifications

Size	2x2
CRI	80 - 89, 90 - 99
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	500 - 1000
Input Wattage	8w - 12w



Outline LED Recessed Type II

Specification-Grade ★★★

Recessed Drywall Luminaire Featuring a Single Continuous Lens

Specifications

Size	2x2
CRI	80 - 89, 90 - 99
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	1000 - 2000
Input Wattage	11w - 21w

ALLURA SERIES

The ALLURA Series of premium-grade pendant mounted luminaires features a slim profile to enhance a space while offering various design configurations. Create visual appeal for any contemporary space with row-mounting, single mount, or structural configurations.



ALLURA A LED Linear Pendant Type A

Premium-Grade ★★
Pendant Mount, Bi-Directional
Luminaire

Features

- 50% up / 50% down
- Double teardrop extruded diffusers
- Standard low voltage dimming (0-10v)
- Available with row-mounting

Specifications

Size	48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	3500 - 12000
Input Wattage	29w - 102w



ALLURA B LED Linear Pendant Type B

Premium-Grade ★★
Pendant Mount, Bi-Directional
Luminaire

Features

- 30% up / 70% down
- Double teardrop extruded diffusers
- Standard low voltage dimming (0-10v)
- Available with row-mounting

Specifications

Size	48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	3500 - 12000
Input Wattage	29w - 102w



ALLURA M LED Linear Pendant Type M

Premium-Grade ★★
Pendant Mount, Bi-Directional
Luminaire


Features

- Multiple Distribution Configurations
- Linear & Oval Aperture designs
- Standard low voltage dimming (0-10v)
- Available with row-mounting
- Integrated Wireless Control Options

Specifications

Size	48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	3200 - 12000
Input Wattage	29w - 102w



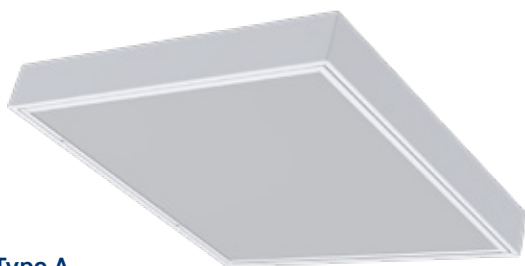

LSTA LED Surface Type A

Premium-Grade ★★
Surface-Mounted Ceiling
Luminaire Featuring a Single
Edge-To-Edge Lens



Specifications

Size	1x1, 1x2, 1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K 4000K, 5000K
Lumen Output	1100 - 9000
Input Wattage	11w - 79w

Applications

- Schools
- Retail Stores
- Offices
- Hospitals
- Nursing Homes



LSTB LED Surface Type B

Premium-Grade ★★
Surface-Mounted Ceiling
Luminaire Featuring Dual
Narrow Teardrop Lenses



Specifications

Size	2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K 4000K, 5000K
Lumen Output	2000 - 4600
Input Wattage	18w - 41w

Applications

- Office Areas
- Retail Stores
- Schools
- Hospitals
- Corridors



LSTC LED Surface Type C

Premium-Grade ★★
Surface-Mounted Ceiling
Luminaire Featuring a Single
Narrow Teardrop Lens



Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K 4000K, 5000K
Lumen Output	2000 - 4100
Input Wattage	18w - 39w

Applications

- Office Areas
- Retail Stores
- Schools
- Hospitals
- Corridors



LSTF LED Surface Type F

Premium-Grade ★★
Surface-Mounted Ceiling
Luminaire Featuring a Shallow
Elliptical Center Lens



Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K 4000K, 5000K
Lumen Output	3800 - 7000
Input Wattage	32w - 55w

Applications

- Office Areas
- Retail Stores
- Schools
- Hospitals
- Corridors



LSTG LED Surface Type G

Premium-Grade ★★
Surface-Mounted Ceiling
Luminaire Featuring Three
Illuminated Lenses



Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	3700 - 9200
Input Wattage	37w - 77w

Applications

- Office Areas
- Retail Stores
- Schools
- Hospitals
- Corridors



LSTH LED Surface Type H

Commercial-Grade ★
Surface Low-Profile Single
Lensed Luminaire



Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K 4000K, 5000K
Lumen Output	2000 - 4000
Input Wattage	18w - 34w

Applications

- Office Areas
- Retail Stores
- Classrooms
- Corridors
- Hospitals
- Nursing Homes



LSTJ LED Surface Type J

Premium-Grade ★★
Surface-Mounted Ceiling
Luminaire Featuring Dual
Shallow Semi-Round Lenses



Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2000 - 6500
Input Wattage	18w - 52w

Applications

- Office Areas
- Retail Stores
- Schools
- Hospitals
- Corridors



LSTP LED Surface Type P

Commercial-Grade ★
Surface-Mounted Ceiling
Luminaire Featuring a Wide
Curved Lens

Specifications

Size	1x4, 2x2, 2x4,
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2700 - 6100
Input Wattage	22w - 49w

Applications

- Office Areas
- Retail Stores
- Classrooms
- Corridors
- Hospitals
- Nursing Homes



LSTZ LED Surface Type Z

Premium-Grade ★★
Surface-Mounted Ceiling
Luminaire Featuring a Single
Angled Center Lens



Specifications

Size	1x4, 2x2, 2x4
CRI	80 - 89
Color Temp.	3000K, 3500K, 4000K, 5000K
Lumen Output	2000 - 4000
Input Wattage	15w - 29w

Applications

- Office Areas
- Retail Stores
- Schools
- Hospitals
- Corridors



LCBA LED Commercial Basket A

Specification-Grade ★★★
Surface/Pendant-Mounted
Direct/Indirect Baffled Luminaire

Specifications

Size	46"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	3500
Input Wattage	32w

Applications

- Boardrooms
- Corridors
- Retail Stores
- Supermarkets
- Studio Lofts



LCAD LED Cadillac

Premium-Grade ★★
Surface-Mounted Cube
Luminaire

Specifications

Size	24", 48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	2000 - 7400
Input Wattage	23w - 86w

Applications

- Corridors
- Chronic Care Facilities
- Nursing Homes
- Utility Areas
- Vanities



LHCAV LED Hospital Cavalier

Premium-Grade ★★
Surface-Mounted Cube
Luminaire

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	3500 - 7100
Input Wattage	32w - 62w

Applications

- Chronic Care Facilities
- Nursing Homes
- Hospitals



LMNE
LED Magic Neutron
 Premium-Grade ★★
 Surface-Mounted Compact
 Wrap-Around Luminaire

Applications

- Corridors
- Stairwells
- Utility Areas
- Kitchens

Specifications

Size	24", 48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	2000 - 7400
Input Wattage	23w - 86w



LVG
LED Vanguard
 Premium-Grade ★★
 Surface-Mounted Vandal-
 Resistant Wrap-Around
 Luminaire

Applications

- Canopies
- Corridors
- Garage & Workshops
- Locker Rooms
- Parking Garages
- Public Housing
- Stairwells

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	3100 (24") 4400 (48")
Input Wattage	33w - 42w



LTRB
LED Transit B
 Specification-Grade ★★★
 Surface-Mounted
 Vandal-Resistant Wrap-Around
 Row-Mountable Luminaire

Applications

- Canopies
- Locker Rooms
- Public Housing
- Public Transit Areas
- Security Lighting
- Walkways

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	2000 - 3700
Input Wattage	20w - 38w



LTRI
LED Tri Light
 Specification-Grade ★★★
 Contemporary ADA Surface/
 Wall Mount Luminaire

Applications

- Stairwells
- Corridors
- Hotels
- Vanities

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	1000 - 5000
Input Wattage	9w - 37w



LEL
LED Ellipse
 Premium-Grade ★★
 Strip Luminaire

Applications

- Commercial Spaces
- Hallways
- Stairwells

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	2000 - 8200
Input Wattage	18w - 72w



LELW
LED Ellipse W
 Specification-Grade ★★★
 ADA Surface Mount LED
 Luminaire

Applications

- Stairwells
- Hallways
- Corridors
- Hotels

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	2000 - 8200
Input Wattage	18w - 72w





LSVA LED Sealed Vapor A

Premium-Grade ★★

Dust and Water Resistant Glass
Reinforced Polyester Gasketed
Luminaire (IP65)



Applications

- Canopies
- Cold Storage Facilities
- Food Processing Areas
- Garage and Parking Garages
- Workshops
- Dusty & Wet Environments

*Optional (consult spec sheet)

Specifications

Size	24", 48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K 5000K
Lumen Output	2200 - 16800
Input Wattage	18w - 130w



LSVB LED Sealed Vapor B

Premium-Grade ★★

Dust and Water Resistant
Glass Reinforced
Polycarbonate Gasketed
Luminaire (IP66)
NEMA 4X



Applications

- Industrial
- Parking Garage
- Warehouses
- Breezeways
- Canopies
- Service Corridors

Specifications

Size	48"
CRI	80 - 89
Color Temp.	4000K, 5000K
Lumen Output	3000 - 7000
Input Wattage	22w - 130w



LMEZ Micro LED MEZ

Premium-Grade ★★

Pendant-Mounted Luminaire

Applications

- Lobbies
- Boardrooms
- Office Area Lighting
- Retail Stores and Supermarkets

Specifications

Size	48"
CRI	80 - 90
Color Temp.	3000K, 3500K 4000K, 5000K
Lumen Output	400lm/ft 1000lm/ft
Input Wattage	4w/ft 11w/ft



LMEZX LED MEZ Multi-Function

Specification-Grade ★★★
Surface/Pendant-Mounted
Luminaire

Applications

- Office Areas
- Retail Stores
- Corridors
- Classrooms
- Libraries

Specifications

Size	24", 48", 96", 144"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	1200 - 6600
Input Wattage	11w - 58w



LMEZ LED MEZ

Specification-Grade ★★★
Various Mounting Options

Applications

- Office Areas
- Retail Stores
- Restaurants
- Perimeters
- Corridors

Specifications

Size	24", 48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	1200 - 10000
Input Wattage	19w - 152w



LMEZY LED MEZ Recessed Multi-Function

Specification-Grade ★★★
Recessed Drywall Luminaire

Applications

- Office Areas
- Retail Stores
- Restaurants
- Perimeters
- Corridors

Specifications

Size	24", 48", 96", 144"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	1100 - 6600
Input Wattage	11w - 58w

LCOM & LCOMN SERIES

Our LCOM and LCOMN Series are commercial-grade strip luminaires perfect for a streamline look and design appeal. This series of luminaires accommodates various types of applications, such as coves, cold storage areas, retail shelving, industrial racks, and utility areas.

P77 Option



LCOM LED Commercial Commercial-Grade ★ Strip Luminaire

Applications

- Coves
- Cold Storage
- Parking Garages
- Retail Shelving
- Industrial Racks
- Utility Areas

Specifications

Size	24", 48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K 5000K
Lumen Output	2200 - 14000
Input Wattage	17w - 104w



P77 Option
Round Extruded Frosted
Acrylic Lens

P95 Option



LCOMN LED Commercial Type N Commercial-Grade ★ Narrow Strip Luminaire

Applications

- Coves
- Cold Storage
- Retail Shelving
- Industrial Racks
- Utility Areas

Specifications

Size	24", 48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K 5000K
Lumen Output	2000 - 8000
Input Wattage	18w - 66w



P95 Option
Frosted Polycarbonate Square
Lens

VL SERIES

Visioneering's VL series are a combination of durability, compact design and affordability. These commercial-grade fixtures are perfect energy efficient replacements for fluorescent luminaires and come standard with low voltage dimming (0-10V).



LMEZ-VL LED MEZ VL

Commercial-Grade ★
Linear Direct/Indirect Pendant
Mount Luminaire

Applications

- Office Areas
- Perimeters
- Retail Stores
- Corridors
- Classrooms
- Libraries
- Hospitals

Specifications

Size	48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K
Lumen Output	4000 - 8000
Input Wattage	34w - 68w



LBL-VL LED Bay Luminaire

Commercial-Grade ★
Surface-Mounted Luminaire
With Polycarbonate Lens

Applications

- Corridors
- Fitting Rooms
- Utility Areas
- Recreation Rooms

Specifications

Size	24", 48", 96"
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	2800 - 24000
Input Wattage	23w - 206w



LMNE-VL LED Magic Neutron

Commercial-Grade ★
Surface-Mounted Compact
Wrap-Around Luminaire With
Polycarbonate Lens

Applications

- Corridors
- Fitting Rooms
- Utility Areas
- Recreation Rooms

Specifications

Size	24", 48"
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	2800 - 5200
Input Wattage	23w - 46w



LMPRE-VL LED Magic Prestige

Commercial-Grade ★
Surface-Mounted Cloud
Luminaire

Applications

- Corridors
- Fitting Rooms
- Utility Areas
- Recreation Rooms

Specifications

Size	.75x2, .75x4
CRI	80 - 89
Color Temp.	3500K, 4000K, 5000K
Lumen Output	3500 - 5000
Input Wattage	32w - 46w





Viscor Inc.

35 Oak St., Toronto, ON M9N 1A1

tel 1-888-245-7991 **fax** 416-245-4778

customer service line (8:30AM–5:00PM EST Monday–Friday)

Visit our website at **www.viscor.com**